







CHAIN SLINGS


 <p>SGG</p> <p>Single leg Clevis Grab Clevis Grab</p>	 <p>SGS</p> <p>Single leg Clevis Grab Clevis Sling</p>	 <p>SSS</p> <p>Single leg Clevis Sling Clevis Sling</p>
 <p>SOG</p> <p>Single leg Oblong Ring Clevis Grab</p>	 <p>SOS</p> <p>Single leg Oblong Ring Clevis Sling</p>	 <p>SOO</p> <p>Single leg Oblong Ring Oblong Ring</p>

SINGLE LEG CHAIN SLINGS

DIAMETER INCHES	WLL LBS	
	DF 4:1 VERTICAL	DF 5:1 VERTICAL
9/32"	3,500	2,800
3/8"	7,100	5,680
1/2"	12,000	9,600
5/8"	18,100	14,480
3/4"	28,300	22,640
7/8"	34,200	27,360
1"	47,700	38,160
1-1/4"	72,300	57,840

 **WARNING** MAXIMUM RATED CAPACITIES FOR NEW SLINGS.  **DO NOT EXCEED**

CHAIN SLINGS

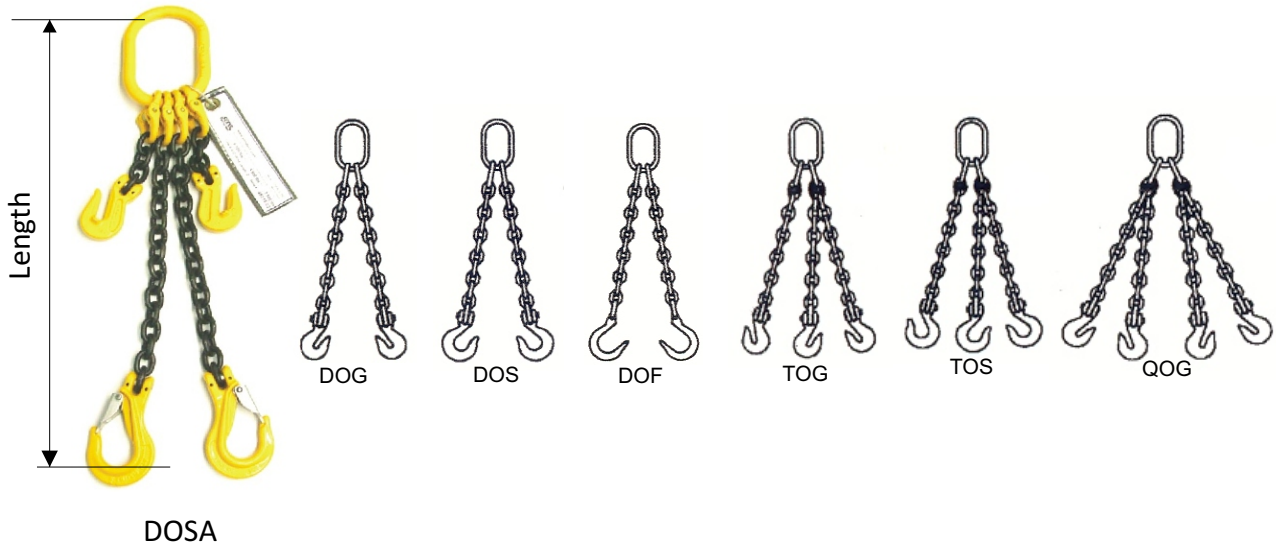

Chain Slings 2, 3, and 4 legged						
Gr. 80 chain size inches	DOUBLE LEG			THREE OR FOUR LEG		
	60°	45°	30°	60°	45°	30°
9/32	6,100	4,900	3,500	9,100	7,400	5,200
3/8	12,300	10,000	7,100	18,400	15,100	10,600
1/2	20,800	17,000	12,000	31,200	25,500	18,000
5/8	31,300	25,600	18,100	47,000	38,400	27,100
3/4	49,000	40,000	28,300	73,500	60,000	42,400
7/8	59,200	48,400	34,200	88,900	72,500	51,300
1	82,600	67,400	47,700	123,900	101,200	71,500
1 1/4	125,200	102,000	72,300	187,800	153,400	108,400

⚠ WARNING MAXIMUM RATED CAPACITIES FOR NEW SLINGS. ⚠ DO NOT EXCEED

Chain slings can be adjustable by a few links of chain and a grab hook, or a shortening clutch



All Components used are Grade 80 rated for over head lifting.
DESIGN FACTOR OF 4:1