


Clevlok Style



- High cycling, long life spring
- Factory replaceable pins
- “I” beam construction for greater strength
- 100% proof tested
- Fatigue rated to grade 100 specifications

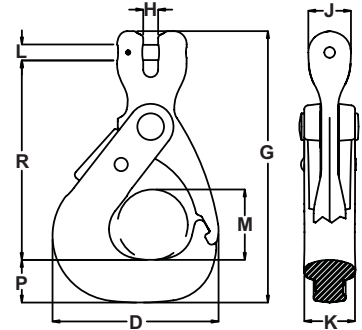


| Size | Working Load Limit | Product Code | Replace Latch Kit Part # | Dimensions | | | | | | | | | Weight | |
|-----------------|--------------------|--------------|--------------------------|------------|-------|------|------|------|------|------|------|------|--------|-----|
| | | | | D | G | H | J | K | L | M | P | R | | |
| Imperial | | | | | | | | | | | | | | |
| in. | lb. | | | in. | in. | in. | in. | in. | in. | in. | in. | in. | in. | lb. |
| 9/32 | 4,300 | 616005 | 656005 | 3.89 | 6.37 | 0.35 | 1.00 | 1.19 | 0.36 | 1.56 | 1.00 | 4.68 | 2.62 | |
| 3/8 | 8,800 | 616010 | 656010 | 5.03 | 8.20 | 0.47 | 1.16 | 1.25 | 0.51 | 2.25 | 1.25 | 6.11 | 4.93 | |
| 1/2 | 15,000 | 616015 | 656015 | 6.68 | 10.07 | 0.59 | 1.50 | 1.63 | 0.63 | 2.81 | 1.75 | 7.25 | 9.32 | |
| 5/8 | 22,600 | 616020 | 656020 | 8.04 | 11.62 | 0.71 | 1.74 | 1.88 | 0.75 | 3.19 | 2.00 | 8.36 | 14.70 | |

Eye Style



- Large eye design for use with chain, wire rope and synthetic material
- Factory replaceable pins
- 100% proof tested
- Fatigue rated to grade 100 specifications
- For welded 7/32” Chain Sling use 9/32” Eye Lodelok Hook

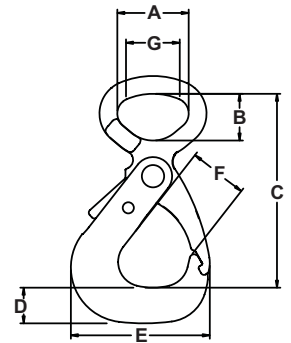

| Size | Working Load Limit | Product Code | Replace Latch Kit Part # | Dimensions | | | | | | | | | Weight | |
|-----------------|--------------------|--------------|--------------------------|------------|------|-------|------|------|-------|------|------|------|--------|-----|
| | | | | A | B | C | D | E | Fmin | G | H | J | | |
| Imperial | | | | | | | | | | | | | | |
| in. | lb. | | | in. | in. | in. | in. | in. | in. | in. | in. | in. | in. | lb. |
| 9/32 | 4,300 | 626005 | 656005 | 2.00 | 1.31 | 5.43 | 1.00 | 3.89 | 1.563 | 1.47 | 0.63 | 1.19 | 2.64 | |
| 3/8 | 8,800 | 626010 | 656010 | 2.50 | 1.78 | 7.41 | 1.25 | 5.03 | 2.250 | 2.00 | 0.75 | 1.25 | 4.86 | |
| 1/2 | 15,000 | 626015 | 656015 | 3.44 | 2.38 | 9.38 | 1.75 | 6.68 | 2.813 | 2.59 | 1.00 | 1.63 | 10.46 | |
| 5/8 | 22,600 | 626020 | 656020 | 3.94 | 2.62 | 10.71 | 2.00 | 8.04 | 3.125 | 2.92 | 1.25 | 1.88 | 16.52 | |