

# Crosby® Shank Hooks




**SEE APPLICATION AND WARNING INFORMATION**

Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) On Pages 122 - 123

## S-319 / S-319N

- Hoist hooks incorporate markings forged into the product which address two (2) **QUIC-CHECK®** features.
  - **Deformation Indicators** -- Two strategically placed marks, one just below the shank or eye and the other on the hook tip, which allows for a **QUIC-CHECK®** measurement to determine if the throat opening has changed, thus indicating abuse or overload.
  - To check, use a measuring device (i.e. tape measure) to measure the distance between the marks. The marks should align to either an inch or half-inch increment on the measuring device. If the measurement does not meet this criteria, the hook should be inspected further for possible damage.
  - **Angle Indicators** -- Indicates the maximum included angle which is allowed between two (2) sling legs in the hook. These indicators also provide the opportunity to approximate other included angles between two sling legs.
- Chemical analysis and tensile tests performed on each PIC to verify chemistry and mechanical properties.

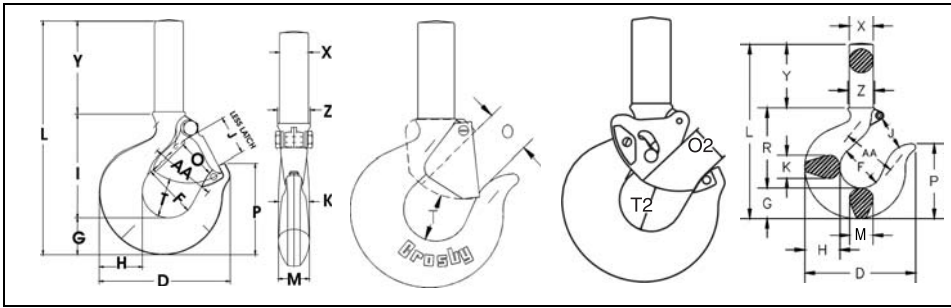

Hook & Swivels

| Hook ID Code | Dimensions (in.) |      |       |       |      |      |       |      |        |       |       |       |      |       |      |       |      |       |
|--------------|------------------|------|-------|-------|------|------|-------|------|--------|-------|-------|-------|------|-------|------|-------|------|-------|
|              | D                | F    | G     | H     | J    | K    | L     | M    | O      | O2 †† | P     | R     | T    | T2 †† | X*   | Y     | Z    | AA    |
| D            | 2.86             | 1.25 | .73   | .81   | .93  | .63  | 5.14  | .63  | .93 †  | -     | 1.96  | 2.35  | .97  | -     | .59  | 2.06  | .69  | 1.50  |
| F            | 3.16             | 1.38 | .84   | .94   | .97  | .71  | 5.68  | .71  | .97 †  | -     | 2.22  | 2.59  | .97  | -     | .66  | 2.25  | .78  | 2.00  |
| G            | 3.59             | 1.50 | 1.00  | 1.16  | 1.06 | .88  | 6.35  | .88  | 1.06 † | -     | 2.44  | 2.76  | 1.03 | -     | .72  | 2.59  | .88  | 2.00  |
| H            | 4.00             | 1.62 | 1.14  | 1.31  | 1.19 | .94  | 7.14  | .94  | 1.16 † | -     | 2.78  | 3.16  | 1.16 | -     | .88  | 2.84  | 1.00 | 2.00  |
| I            | 4.84             | 2.00 | 1.44  | 1.63  | 1.50 | 1.31 | 8.63  | 1.13 | 1.36 † | 1.00  | 3.47  | 3.85  | 1.53 | 1.50  | 1.16 | 3.44  | 1.25 | 2.50  |
| J            | 6.28             | 2.50 | 1.82  | 2.06  | 1.78 | 1.66 | 10.43 | 1.44 | 1.61 † | 1.31  | 4.59  | 4.77  | 1.96 | 1.88  | 1.41 | 3.84  | 1.56 | 3.00  |
| K            | 7.54             | 3.00 | 2.26  | 2.63  | 2.41 | 1.88 | 12.52 | 1.63 | 2.08 † | 1.81  | 5.25  | 5.88  | 2.47 | 2.25  | 1.81 | 4.38  | 1.94 | 4.00  |
| L            | 8.34             | 3.25 | 2.60  | 2.94  | 2.62 | 2.19 | 13.47 | 1.94 | 2.27 † | 2.00  | 5.96  | 6.37  | 2.62 | 2.31  | 2.00 | 4.50  | 2.19 | 4.00  |
| N            | 10.34            | 4.25 | 3.01  | 3.50  | 3.41 | 2.69 | 16.65 | 2.38 | 3.02 † | 2.75  | 6.88  | 8.14  | 2.83 | 2.56  | 2.56 | 5.50  | 2.63 | 5.00  |
| O            | 13.62            | 5.00 | 3.62  | 4.62  | 4.00 | 3.00 | 23.09 | 3.00 | 3.25   | -     | 8.78  | 9.44  | 3.44 | -     | 3.12 | 10.00 | 3.12 | 6.50  |
| O            | 13.62            | 5.00 | 3.62  | 4.62  | 4.00 | 3.00 | 31.09 | 3.00 | 3.25   | -     | 8.78  | 9.44  | 3.44 | -     | 3.12 | 18.00 | 3.12 | 6.50  |
| P            | 14.06            | 5.38 | 4.56  | 5.00  | 4.25 | 3.62 | 32.12 | 3.00 | 3.00   | -     | 11.31 | 12.50 | 3.88 | -     | 4.00 | 15.00 | 4.00 | 7.00  |
| P            | 14.06            | 5.38 | 4.56  | 5.00  | 4.25 | 3.62 | 41.12 | 3.00 | 3.00   | -     | 11.31 | 12.50 | 3.88 | -     | 4.00 | 24.00 | 4.00 | 7.00  |
| S            | 15.44            | 6.00 | 5.06  | 5.50  | 4.75 | 3.72 | 34.12 | 3.25 | 3.38   | -     | 12.56 | 14.00 | 4.75 | -     | 4.19 | 15.00 | 4.19 | 8.00  |
| S            | 15.44            | 6.00 | 5.06  | 5.50  | 4.75 | 3.72 | 43.12 | 3.25 | 3.38   | -     | 12.56 | 14.00 | 4.75 | -     | 4.19 | 24.00 | 4.19 | 8.00  |
| T            | 18.50            | 7.00 | 6.00  | 6.50  | 5.75 | 4.44 | 36.06 | 3.91 | 4.12   | -     | 14.75 | 15.56 | 5.69 | -     | 4.50 | 14.50 | 4.50 | 10.00 |
| T            | 18.50            | 7.00 | 6.00  | 6.50  | 5.75 | 4.44 | 47.56 | 3.91 | 4.12   | -     | 14.75 | 15.56 | 5.69 | -     | 4.50 | 26.00 | 4.50 | 10.00 |
| U            | 20.62            | 7.75 | 6.69  | 7.25  | 6.50 | 5.25 | 41.16 | 4.25 | 4.88   | -     | 16.53 | 19.38 | 6.00 | -     | 5.00 | 15.00 | 5.00 | 11.50 |
| U            | 20.62            | 7.75 | 6.69  | 7.25  | 6.50 | 5.25 | 49.16 | 4.25 | 4.88   | -     | 16.53 | 19.38 | 6.00 | -     | 5.00 | 23.00 | 5.00 | 11.50 |
| W            | 23.00            | 6.81 | 8.59  | 9.88  | 5.88 | 5.50 | 42.12 | 5.50 | 4.50   | -     | 17.25 | 18.41 | 7.00 | -     | 7.00 | 15.00 | 7.00 | 12.00 |
| W            | 23.00            | 6.81 | 8.59  | 9.88  | 5.88 | 5.50 | 48.12 | 5.50 | 4.50   | -     | 17.25 | 18.41 | 7.00 | -     | 7.00 | 21.00 | 7.00 | 12.00 |
| X            | 24.38            | 6.75 | 9.12  | 10.94 | 6.00 | 6.00 | 45.75 | 6.00 | 4.50   | -     | 18.00 | 18.38 | 7.00 | -     | 7.25 | 18.00 | 7.25 | 13.00 |
| Y            | 26.69            | 7.50 | 9.75  | 11.81 | 6.60 | 7.00 | 50.50 | 7.00 | 5.00   | -     | 19.75 | 20.50 | 8.00 | -     | 8.00 | 20.00 | 8.00 | 13.00 |
| Z            | 30.12            | 9.50 | 10.62 | 12.94 | 8.00 | 7.25 | 54.69 | 8.00 | 6.25   | -     | 22.69 | 23.50 | 8.25 | -     | 9.50 | 20.00 | 9.50 | 15.00 |

\* Rough as forged dimension. Shank will not machine to this dimension. Please refer to page 123 for recommended shank diameter when machining.  
 † 3/4tC - 22tA dimensions shown are for S-4320 Latch Kits. Dimensions for sizes 20 ton carbon and larger are for PL Latch Kits.  
 †† Dimensions are for PL-N latch kits.