

Excavator Weld-on Hook 8-081

Product information



Safety hook to be welded on the excavator bucket.
Load rated parts are 100% magnaflux crack detected.
Individual forged parts are traceable to Test Certification.
Proof tested to 2.5 times the WLL.
Fatigue rated to 1.5 times the WLL.
WLL forged onto each product for quick and easy identification.
Lugs designed to assist the welding process.
A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations."


... [Read more](#)

Material: Forged alloy steel, quenched and tempered.
Marking: According to standard, CE-marked, Size, grade, manufacturer ID, traceability.
Temperature range: -40°C up to +200°C (without reduction in WLL).
Finish: Yellow painted.
Standard: EN 1677-1

Safety factor: 5:1

Excavator Weld-on Hook 8-081


Blueprint



Technical data

Part code	WLL	Repair kits	a in	F in	H, in	L in	Pmm in	T in	Wmm in	HV mm in	Weight lb
420500100420	2,200	8-P081-01	0.16	0.98	1.06	2.83	0.71	0.71	3.74	0.28	1.32
420500200420	4,400	8-P081-02	0.2	1.18	1.18	3.35	0.98	0.79	4.53	0.31	2.2
420500300420	6,600	8-P081-03	0.24	1.38	1.18	4.13	1.1	0.91	5.24	0.35	3.09
420500400420	8,800	8-P081-04	0.28	1.65	1.5	4.37	1.1	1.18	5.59	0.39	4.85
420500500420	11,000	8-P081-05	0.28	1.73	1.85	5.2	1.18	1.22	6.57	0.47	6.61
420500800420	17,600	8-P081-08	0.31	1.97	2.05	5.28	1.26	1.54	6.93	0.47	8.16
420501000420	22,000	8-P081-10	0.31	2.2	2.2	6.61	1.73	1.65	8.74	0.51	13.67
420501500420	33,000	8-P081-15	0.39	2.4	2.64	7.24	2.13	1.77	9.53	0.55	17.42

Excavator Weld-on Hook 8-081

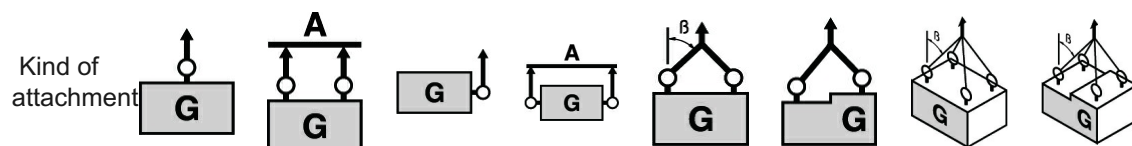

Number of legs	1	2	1	2	2	2	2	3-4	3-4	3-4
Load direction	0°	0°	90°	90°	0-45°	45-60°	Unsymm.	0-45°	45-60°	Unsymm.
8-081-01	1	2	1	2	1,4	1	1	2,1	1,5	1
8-081-02	2	4	2	4	2,8	2	2	4,2	3	2
8-081-03	3	6	3	6	4,2	3	3	6,3	4,5	3
8-081-04	4	8	4	8	5,6	4	4	8,4	6	4
8-081-05	5	10	5	10	7	5	5	10,5	7,5	5
8-081-08	8	16	8	16	11,2	8	8	16,8	12	8
8-081-10	10	20	10	20	14	10	10	21	15	10
8-081-15	15	30	15	30	21	15	15	31,5	22,5	15