

Alloy Swivel Bearing Hoist Hook 8-175N

Product information



Built with ball bearing and enables full swivel feature under load. At least 25% greater WLL than traditional Grade 8 products. Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL. Magnaflux crack detection is performed 100% on each batch
[... Read more](#)

Material: Quenched and Tempered Alloy Steel.

Marking: According to standard

Temperature range: Tempering temperature minimum 400°C


Standard: EN 1677-1

Safety factor: 4:1

Grade: 10

Alloy Swivel Bearing Hoist Hook 8-175N

Blueprint

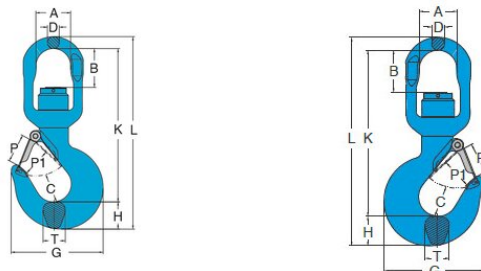

Technical data

Part code	Chain diameter mm	WLL (metric) tonnes	Type	A in	B in	C in	D in	G, in	H, in	K in	L in	Pmm in	P1 mm in	T in	Weight lb
11.108-175N-02	7-8	2	CC	1.42	1.14	1.02	0.51	3.58	0.98	5.63	7.13	0.94	0.79	0.87	1.98
-	28	22	JJ	4.84	4.57	2.8	2.01	10.91	2.99	18.46	23.58	3.39	3.19	2.68	73.85