Industrial Rigging & Supply | Lifting Solutions Group Axel Johnson International

Beam Clamp IPBC

Product information



The Crosby IP Model IPBC is a horizontal lifting clamp with a pretension system, designed for horizontal transfer operations. Its welded alloy steel body provides strength in a compact design, while the integrated handle facilitates clamp positioning. Available with working load limits of 1 to 3 tonnes and jaw openings up to 25 mm.

Best used for:

- Horizontal transfer operations requiring lifting clamps with a pretension system.
- Applications requiring a clamp with a jaw opening of 0–20 mm or 0–25 mm, depending on model.

Product benefits:

- Welded alloy steel body combines structural strength with compact dimensions.
- Integrated handle allows easier positioning during clamp installation.
- Available capacities and jaw openings support different lifting requirements.
- Individually proof tested to twice the WLL, with certification supplied.
- Individual serial numbers and test certificates support traceability and inspection documentation.

... *Read more*


Features:
Material: Alloy steel.
Marking: According to standard, CE-mark, WLL, Logo, Type, Jaw opening, Serial number, Proof load test date
Temperature range: -40°C (-40°F) up to +100°C (+212°F)
Standard: EN 13155

© November 2026 - All Rights Reserved

Industrial Rigging & Supply | Lifting Solutions Group Axel Johnson International

Beam Clamp IPBC

Blueprint

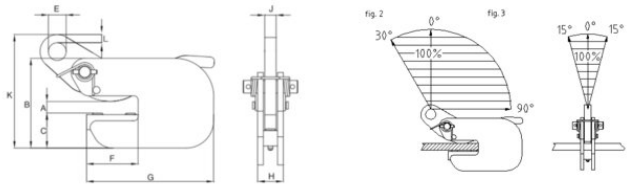

Technical data

Part code	Code	WLL (metric) tonnes	Jaw width in	A in	B in	C in	E in	F in	G in	H in	J in	K in	L in	Weight lb
16.012700410	1-IPBC	1	0-0.79	0-0.79	5.2	2.05	1.02	2.95	7.28	1.42	0.63	7.17	0.47	7.72
16.012700411	2-IPBC	2	0-0.98	0-0.98	5.98	2.44	1.18	3.23	8.27	1.93	0.79	8.58	0.59	14.33
16.012700412	3-IPBC	3	0-0.98	0-0.98	6.18	2.6	1.18	3.23	8.27	2.24	0.79	8.86	0.59	18.74

© November 2026 - All Rights Reserved