


Verope Steel Wire Rope Verotop

Verope Steel Wire Rope Verotop

Product information

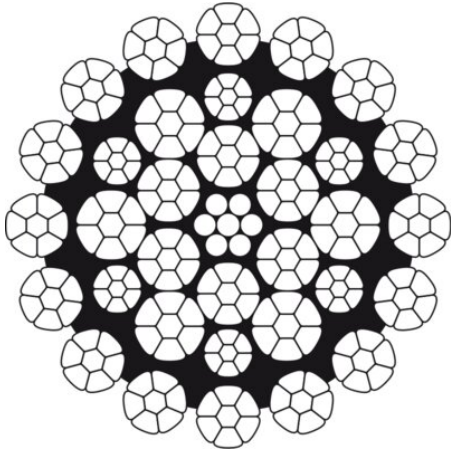

Wire rope construction: verotop is a very flexible rotation-resistant rope with compacted strands.

Features:

- Extremely high breaking force.
- Very good fatigue properties.
- Very high resistance against flattening and wear.
- Especially suitable for multiple layer spooling.

ISO 4309 Rope Category No: All Diameters **RCN.23-2.**

... [Read more](#)

Tower crane



Mobile crane



Crawler crane



Piling crane



Truck crane



Self-erected crane



Luffing crane



Jib crane



Offshore crane




Deck crane



Knuckle boom crane



Overhead cranes



Marking: According to standard

Standard: EN 12385-4

Note: Verotop can be used either with or without swivel.

Fill factor: 0,738

RCN: 23-2

Tolerance Ø: +2% to +4%

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104100806270129	8	1,960	Galvanized	zZ	61.1	37	SupplierStandard	0.68
104100805270129	8	1,960	Galvanized	sS	61.1	37	SupplierStandard	0.68
104100806070129	8	1,960	Bright	zZ	61.1	37	SupplierStandard	0.68
104100805070129	8	1,960	Bright	sS	61.1	37	SupplierStandard	0.68
104100806300129	8	2,160	Galvanized	zZ	62.7	37	SupplierStandard	0.68
104100805300129	8	2,160	Galvanized	sS	62.7	37	SupplierStandard	0.68
104100806100129	8	2,160	Bright	zZ	62.7	37	SupplierStandard	0.68
104100805100129	8	2,160	Bright	sS	62.7	37	SupplierStandard	0.68
104100906270129	9	1,960	Galvanized	zZ	77.3	47	SupplierStandard	0.88
104100905270129	9	1,960	Galvanized	sS	77.3	47	SupplierStandard	0.88
104100906070129	9	1,960	Bright	zZ	77.3	47	SupplierStandard	0.88
104100905070129	9	1,960	Bright	sS	77.3	47	SupplierStandard	0.88
104100906300129	9	2,160	Galvanized	zZ	79.4	47	SupplierStandard	0.88
104100905300129	9	2,160	Galvanized	sS	79.4	47	SupplierStandard	0.88
104100906100129	9	2,160	Bright	zZ	79.4	47	SupplierStandard	0.88
104100905100129	9	2,160	Bright	sS	79.4	47	SupplierStandard	0.88
104101006270129	10	1,960	Galvanized	zZ	95.43	58	SupplierStandard	1.08
104101005270129	10	1,960	Galvanized	sS	95.43	58	SupplierStandard	1.08
104101006070129	10	1,960	Bright	zZ	95.43	58	SupplierStandard	1.08
104101005070129	10	1,960	Bright	sS	95.43	58	SupplierStandard	1.08
104101006300129	10	2,160	Galvanized	zZ	98	58	SupplierStandard	1.08
104101005300129	10	2,160	Galvanized	sS	98	58	SupplierStandard	1.08
104101006100129	10	2,160	Bright	zZ	98	58	SupplierStandard	1.08
104101005100129	10	2,160	Bright	sS	98	58	SupplierStandard	1.08
104101105070129	11	1,960	Bright	sS	115.5	70	SupplierStandard	1.3
104101106070129	11	1,960	Bright	zZ	115.5	70	SupplierStandard	1.3
104101105270129	11	1,960	Galvanized	sS	115.5	70	SupplierStandard	1.3
104101106270129	11	1,960	Galvanized	zZ	115.5	70	SupplierStandard	1.3
104101105100129	11	2,160	Bright	sS	118.6	70	SupplierStandard	1.3
104101106100129	11	2,160	Bright	zZ	118.6	70	SupplierStandard	1.3
104101105300129	11	2,160	Galvanized	sS	118.6	70	SupplierStandard	1.3

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104101106300129	11	2,160	Galvanized	zZ	118.6	70	SupplierStandard	1.3
104101205070129	12	1,960	Bright	sS	137.4	83	SupplierStandard	1.57
104101206070129	12	1,960	Bright	zZ	137.4	83	SupplierStandard	1.57
104101205270129	12	1,960	Galvanized	sS	137.4	83	SupplierStandard	1.57
104101206270129	12	1,960	Galvanized	zZ	137.4	83	SupplierStandard	1.57
104101205100129	12	2,160	Bright	sS	141.2	83	SupplierStandard	1.57
104101206100129	12	2,160	Bright	zZ	141.2	83	SupplierStandard	1.57
104101205300129	12	2,160	Galvanized	sS	141.2	83	SupplierStandard	1.57
104101206300129	12	2,160	Galvanized	zZ	141.2	83	SupplierStandard	1.57
104101275070129	12.7	1,960	Bright	sS	153.9	93	SupplierStandard	1.74
104101276070129	12.7	1,960	Bright	zZ	153.9	93	SupplierStandard	1.74
104101275270129	12.7	1,960	Galvanized	sS	153.9	93	SupplierStandard	1.74
104101276270129	12.7	1,960	Galvanized	zZ	153.9	93	SupplierStandard	1.74
104101275100129	12.7	2,160	Bright	sS	158.1	93	SupplierStandard	1.74
104101276100129	12.7	2,160	Bright	zZ	158.1	93	SupplierStandard	1.74
104101275300129	12.7	2,160	Galvanized	sS	158.1	93	SupplierStandard	1.74
104101276300129	12.7	2,160	Galvanized	zZ	158.1	93	SupplierStandard	1.74
104101305070129	13	1,960	Bright	sS	161.3	98	SupplierStandard	1.83
104101306070129	13	1,960	Bright	zZ	161.3	98	SupplierStandard	1.83
104101305270129	13	1,960	Galvanized	sS	161.3	98	SupplierStandard	1.83
104101306270129	13	1,960	Galvanized	zZ	161.3	98	SupplierStandard	1.83
104101305100129	13	2,160	Bright	sS	165.7	98	SupplierStandard	1.83
104101306100129	13	2,160	Bright	zZ	165.7	98	SupplierStandard	1.83
104101305300129	13	2,160	Galvanized	sS	165.7	98	SupplierStandard	1.83
104101306300129	13	2,160	Galvanized	zZ	165.7	98	SupplierStandard	1.83
104101405070129	14	1,960	Bright	sS	187	114	SupplierStandard	2.12
104101406070129	14	1,960	Bright	zZ	187	114	SupplierStandard	2.12
104101405270129	14	1,960	Galvanized	sS	187	114	SupplierStandard	2.12
104101406270129	14	1,960	Galvanized	zZ	187	114	SupplierStandard	2.12
104101405100129	14	2,160	Bright	sS	192.2	114	SupplierStandard	2.12
104101406100129	14	2,160	Bright	zZ	192.2	114	SupplierStandard	2.12

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104101405300129	14	2,160	Galvanized	sS	192.2	114	SupplierStandard	2.12
104101406300129	14	2,160	Galvanized	zZ	192.2	114	SupplierStandard	2.12
104101505070129	15	1,960	Bright	sS	214.7	130	SupplierStandard	2.43
104101506070129	15	1,960	Bright	zZ	214.7	130	SupplierStandard	2.43
104101505270129	15	1,960	Galvanized	sS	214.7	130	SupplierStandard	2.43
104101506270129	15	1,960	Galvanized	zZ	214.7	130	SupplierStandard	2.43
104101505100129	15	2,160	Bright	sS	220.6	130	SupplierStandard	2.43
104101506100129	15	2,160	Bright	zZ	220.6	130	SupplierStandard	2.43
104101505300129	15	2,160	Galvanized	sS	220.6	130	SupplierStandard	2.43
104101506300129	15	2,160	Galvanized	zZ	220.6	130	SupplierStandard	2.43
104101605070129	16	1,960	Bright	sS	244.3	148	SupplierStandard	2.76
104101606070129	16	1,960	Bright	zZ	244.3	148	SupplierStandard	2.76
104101605270129	16	1,960	Galvanized	sS	244.3	148	SupplierStandard	2.76
104101606270129	16	1,960	Galvanized	zZ	244.3	148	SupplierStandard	2.76
104101604070122	16	1,960	Bright	sZ	244.3	148	A-2	2.76
104101605100129	16	2,160	Bright	sS	251	148	SupplierStandard	2.76
104101606100129	16	2,160	Bright	zZ	251	148	SupplierStandard	2.76
104101605300129	16	2,160	Galvanized	sS	251	148	SupplierStandard	2.76
104101606300129	16	2,160	Galvanized	zZ	251	148	SupplierStandard	2.76
104101705070129	17	1,960	Bright	sS	275.8	168	SupplierStandard	3.13
104101706070129	17	1,960	Bright	zZ	275.8	168	SupplierStandard	3.13
104101705270129	17	1,960	Galvanized	sS	275.8	168	SupplierStandard	3.13
104101706270129	17	1,960	Galvanized	zZ	275.8	168	SupplierStandard	3.13
104101705100129	17	2,160	Bright	sS	283.3	168	SupplierStandard	3.13
104101706100129	17	2,160	Bright	zZ	283.3	168	SupplierStandard	3.13
104101705300129	17	2,160	Galvanized	sS	283.3	168	SupplierStandard	3.13
104101706300129	17	2,160	Galvanized	zZ	283.3	168	SupplierStandard	3.13
104101805070129	18	1,960	Bright	sS	309.2	188	SupplierStandard	3.51
104101806070129	18	1,960	Bright	zZ	309.2	188	SupplierStandard	3.51
104101805270129	18	1,960	Galvanized	sS	309.2	188	SupplierStandard	3.51
104101806270129	18	1,960	Galvanized	zZ	309.2	188	SupplierStandard	3.51

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104101805270123	18	1,960	Galvanized	sS	309.2	188	A-3	3.51
104101805100129	18	2,160	Bright	sS	317.7	188	SupplierStandard	3.51
104101806100129	18	2,160	Bright	zZ	317.7	188	SupplierStandard	3.51
104101805300129	18	2,160	Galvanized	sS	317.7	188	SupplierStandard	3.51
104101806300129	18	2,160	Galvanized	zZ	317.7	188	SupplierStandard	3.51
104101905070129	19	1,960	Bright	sS	344.5	209	SupplierStandard	3.9
104101906070129	19	1,960	Bright	zZ	344.5	209	SupplierStandard	3.9
104101905270129	19	1,960	Galvanized	sS	344.5	209	SupplierStandard	3.9
104101906270129	19	1,960	Galvanized	zZ	344.5	209	SupplierStandard	3.9
104101905100129	19	2,160	Bright	sS	353.9	209	SupplierStandard	3.9
104101906100129	19	2,160	Bright	zZ	353.9	209	SupplierStandard	3.9
104101905300129	19	2,160	Galvanized	sS	353.9	209	SupplierStandard	3.9
104101906300129	19	2,160	Galvanized	zZ	353.9	209	SupplierStandard	3.9
104102005070129	20	1,960	Bright	sS	381.7	232	SupplierStandard	4.32
104102006070129	20	1,960	Bright	zZ	381.7	232	SupplierStandard	4.32
104102005270129	20	1,960	Galvanized	sS	381.7	232	SupplierStandard	4.32
104102006270129	20	1,960	Galvanized	zZ	381.7	232	SupplierStandard	4.32
104102005100129	20	2,160	Bright	sS	392.2	232	SupplierStandard	4.32
104102006100129	20	2,160	Bright	zZ	392.2	232	SupplierStandard	4.32
104102005300129	20	2,160	Galvanized	sS	392.2	232	SupplierStandard	4.32
104102006300129	20	2,160	Galvanized	zZ	392.2	232	SupplierStandard	4.32
104102105070129	21	1,960	Bright	sS	420.8	256	SupplierStandard	4.76
104102106070129	21	1,960	Bright	zZ	420.8	256	SupplierStandard	4.76
104102105270129	21	1,960	Galvanized	sS	420.8	256	SupplierStandard	4.76
104102106270129	21	1,960	Galvanized	zZ	420.8	256	SupplierStandard	4.76
104102105270121	21	1,960	Galvanized	sS	420.8	256	A-1	4.76
104102105100129	21	2,160	Bright	sS	432.4	256	SupplierStandard	4.76
104102106100129	21	2,160	Bright	zZ	432.4	256	SupplierStandard	4.76
104102105300129	21	2,160	Galvanized	sS	432.4	256	SupplierStandard	4.76
104102106300129	21	2,160	Galvanized	zZ	432.4	256	SupplierStandard	4.76
104102205070129	22	1,960	Bright	sS	461.9	281	SupplierStandard	5.22

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104102206070129	22	1,960	Bright	zZ	461.9	281	SupplierStandard	5.22
104102205270129	22	1,960	Galvanized	sS	461.9	281	SupplierStandard	5.22
104102206270129	22	1,960	Galvanized	zZ	461.9	281	SupplierStandard	5.22
104102205100129	22	2,160	Bright	sS	474.5	281	SupplierStandard	5.22
104102206100129	22	2,160	Bright	zZ	474.5	281	SupplierStandard	5.22
104102205300129	22	2,160	Galvanized	sS	474.5	281	SupplierStandard	5.22
104102206300129	22	2,160	Galvanized	zZ	474.5	281	SupplierStandard	5.22
104102245070129	22.4	1,960	Bright	sS	478.8	286	SupplierStandard	5.4
104102246070129	22.4	1,960	Bright	zZ	487.8	286	SupplierStandard	5.4
104102245270129	22.4	1,960	Galvanized	sS	487.8	286	SupplierStandard	5.4
104102246270129	22.4	1,960	Galvanized	zZ	487.8	286	SupplierStandard	5.4
104102245100129	22.4	2,160	Bright	sS	491.9	286	SupplierStandard	5.4
104102246100129	22.4	2,160	Bright	zZ	491.9	286	SupplierStandard	5.4
104102245300129	22.4	2,160	Galvanized	sS	491.9	286	SupplierStandard	5.4
104102246300129	22.4	2,160	Galvanized	zZ	491.9	286	SupplierStandard	5.4
104102305070129	23	1,960	Bright	sS	504.8	307	SupplierStandard	5.71
104102306070129	23	1,960	Bright	zZ	504.8	307	SupplierStandard	5.71
104102305270129	23	1,960	Galvanized	sS	504.8	307	SupplierStandard	5.71
104102306270129	23	1,960	Galvanized	zZ	504.8	307	SupplierStandard	5.71
104102305100129	23	2,160	Bright	sS	518.6	307	SupplierStandard	5.71
104102306100129	23	2,160	Bright	zZ	518.6	307	SupplierStandard	5.71
104102305300129	23	2,160	Galvanized	sS	518.6	307	SupplierStandard	5.71
104102306300129	23	2,160	Galvanized	zZ	518.6	307	SupplierStandard	5.71
104102405070129	24	1,960	Bright	sS	549.7	334	SupplierStandard	6.22
104102406070129	24	1,960	Bright	zZ	549.7	334	SupplierStandard	6.22
104102405270129	24	1,960	Galvanized	sS	549.7	334	SupplierStandard	6.22
104102406270129	24	1,960	Galvanized	zZ	549.7	334	SupplierStandard	6.22
104102405100129	24	2,160	Bright	sS	564.7	334	SupplierStandard	6.22
104102406100129	24	2,160	Bright	zZ	564.7	334	SupplierStandard	6.22
104102405300129	24	2,160	Galvanized	sS	564.7	334	SupplierStandard	6.22
104102406300129	24	2,160	Galvanized	zZ	564.7	334	SupplierStandard	6.22

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104102505070129	25	1,960	Bright	sS	596.4	362	SupplierStandard	6.75
104102506070129	25	1,960	Bright	zZ	596.4	362	SupplierStandard	6.75
104102505270129	25	1,960	Galvanized	sS	596.4	362	SupplierStandard	6.75
104102506270129	25	1,960	Galvanized	zZ	596.4	362	SupplierStandard	6.75
104102505100129	25	2,160	Bright	sS	612.8	362	SupplierStandard	6.75
104102506100129	25	2,160	Bright	zZ	612.8	362	SupplierStandard	6.75
104102505300129	25	2,160	Galvanized	sS	612.8	362	SupplierStandard	6.75
104102506300129	25	2,160	Galvanized	zZ	612.8	362	SupplierStandard	6.75
104102545070129	25.4	1,960	Bright	sS	615.7	374	SupplierStandard	6.97
104102546070129	25.4	1,960	Bright	zZ	615.7	374	SupplierStandard	6.97
104102545270129	25.4	1,960	Galvanized	sS	615.7	374	SupplierStandard	6.97
104102546270129	25.4	1,960	Galvanized	zZ	615.7	374	SupplierStandard	6.97
104102545100129	25.4	2,160	Bright	sS	632.5	374	SupplierStandard	6.97
104102546100129	25.4	2,160	Bright	zZ	632.5	374	SupplierStandard	6.97
104102545300129	25.4	2,160	Galvanized	sS	632.5	374	SupplierStandard	6.97
104102546300129	25.4	2,160	Galvanized	zZ	632.5	374	SupplierStandard	6.97
104102605070129	26	1,960	Bright	sS	645.1	392	SupplierStandard	7.3
104102606070129	26	1,960	Bright	zZ	645.1	392	SupplierStandard	7.3
104102605270129	26	1,960	Galvanized	sS	645.1	392	SupplierStandard	7.3
104102606270129	26	1,960	Galvanized	zZ	645.1	392	SupplierStandard	7.3
104102605100129	26	2,160	Bright	sS	662.8	392	SupplierStandard	7.3
104102606100129	26	2,160	Bright	zZ	662.8	392	SupplierStandard	7.3
104102605300129	26	2,160	Galvanized	sS	662.8	392	SupplierStandard	7.3
104102606300129	26	2,160	Galvanized	zZ	662.8	392	SupplierStandard	7.3
104102705070129	27	1,960	Bright	sS	695.7	423	SupplierStandard	7.87
104102706070129	27	1,960	Bright	zZ	695.7	423	SupplierStandard	7.87
104102705270129	27	1,960	Galvanized	sS	695.7	423	SupplierStandard	7.87
104102706270129	27	1,960	Galvanized	zZ	695.7	423	SupplierStandard	7.87
104102705100129	27	2,160	Bright	sS	714.7	423	SupplierStandard	7.87
104102706100129	27	2,160	Bright	zZ	714.7	423	SupplierStandard	7.87
104102705300129	27	2,160	Galvanized	sS	714.7	423	SupplierStandard	7.87

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104102706300129	27	2,160	Galvanized	zZ	714.7	423	SupplierStandard	7.87
104102805070129	28	1,960	Bright	sS	748.2	454	SupplierStandard	8.47
104102806070129	28	1,960	Bright	zZ	748.2	454	SupplierStandard	8.47
104102805270129	28	1,960	Galvanized	sS	748.2	454	SupplierStandard	8.47
104102806270129	28	1,960	Galvanized	zZ	748.2	454	SupplierStandard	8.47
104102805100129	28	2,160	Bright	sS	768.7	454	SupplierStandard	8.47
104102806100129	28	2,160	Bright	zZ	768.7	454	SupplierStandard	8.47
104102805300129	28	2,160	Galvanized	sS	768.7	454	SupplierStandard	8.47
104102806300129	28	2,160	Galvanized	zZ	768.7	454	SupplierStandard	8.47
104102865070129	28.6	1,960	Bright	sS	780.6	474	SupplierStandard	8.84
104102866070129	28.6	1,960	Bright	zZ	780.6	474	SupplierStandard	8.84
104102865270129	28.6	1,960	Galvanized	sS	780.6	474	SupplierStandard	8.84
104102866270129	28.6	1,960	Galvanized	zZ	780.6	474	SupplierStandard	8.84
104102865100129	28.6	2,160	Bright	sS	802	474	SupplierStandard	8.84
104102866100129	28.6	2,160	Bright	zZ	802	474	SupplierStandard	8.84
104102865300129	28.6	2,160	Galvanized	sS	802	474	SupplierStandard	8.84
104102866300129	28.6	2,160	Galvanized	zZ	802	474	SupplierStandard	8.84
104102905070129	29	1,960	Bright	sS	802.6	487	SupplierStandard	9.08
104102906070129	29	1,960	Bright	zZ	802.6	487	SupplierStandard	9.08
104102905270129	29	1,960	Galvanized	sS	802.6	487	SupplierStandard	9.08
104102906270129	29	1,960	Galvanized	zZ	802.6	487	SupplierStandard	9.08
104102905100129	29	2,160	Bright	sS	824.5	487	SupplierStandard	9.08
104102906100129	29	2,160	Bright	zZ	824.5	487	SupplierStandard	9.08
104102905300129	29	2,160	Galvanized	sS	824.5	487	SupplierStandard	9.08
104102906300129	29	2,160	Galvanized	zZ	824.5	487	SupplierStandard	9.08
104103005070129	30	1,960	Bright	sS	858.9	522	SupplierStandard	9.72
104103006070129	30	1,960	Bright	zZ	858.9	522	SupplierStandard	9.72
104103005270129	30	1,960	Galvanized	sS	858.9	522	SupplierStandard	9.72
104103006270129	30	1,960	Galvanized	zZ	858.9	522	SupplierStandard	9.72
104103005100129	30	2,160	Bright	sS	882.4	522	SupplierStandard	9.72
104103006100129	30	2,160	Bright	zZ	882.4	522	SupplierStandard	9.72

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104103005300129	30	2,160	Galvanized	sS	882.4	522	SupplierStandard	9.72
104103006300129	30	2,160	Galvanized	zZ	882.4	522	SupplierStandard	9.72
104103105070129	31	1,960	Bright	sS	917.1	557	SupplierStandard	10.38
104103106070129	31	1,960	Bright	zZ	917.1	557	SupplierStandard	10.38
104103105270129	31	1,960	Galvanized	sS	917.1	557	SupplierStandard	10.38
104103106270129	31	1,960	Galvanized	zZ	917.1	557	SupplierStandard	10.38
104103105100129	31	2,160	Bright	sS	942.2	557	SupplierStandard	10.38
104103106100129	31	2,160	Bright	zZ	942.2	557	SupplierStandard	10.38
104103105300129	31	2,160	Galvanized	sS	942.2	557	SupplierStandard	10.38
104103106300129	31	2,160	Galvanized	zZ	942.2	557	SupplierStandard	10.38
104103205070129	32	1,960	Bright	sS	977.2	594	SupplierStandard	11.07
104103206070129	32	1,960	Bright	zZ	977.2	594	SupplierStandard	11.07
104103205270129	32	1,960	Galvanized	sS	977.2	594	SupplierStandard	11.07
104103206270129	32	1,960	Galvanized	zZ	977.2	594	SupplierStandard	11.07
104103205100129	32	2,160	Bright	sS	1,004	594	SupplierStandard	11.07
104103206100129	32	2,160	Bright	zZ	1,004	594	SupplierStandard	11.07
104103205300129	32	2,160	Galvanized	sS	1,004	594	SupplierStandard	11.07
104103206300129	32	2,160	Galvanized	zZ	1,004	594	SupplierStandard	11.07
104103305070129	33	1,960	Bright	sS	1,039	631	SupplierStandard	11.75
104103306070129	33	1,960	Bright	zZ	1,039	631	SupplierStandard	11.75
104103305270129	33	1,960	Galvanized	sS	1,039	631	SupplierStandard	11.75
104103306270129	33	1,960	Galvanized	zZ	1,039	631	SupplierStandard	11.75
104103305100129	33	2,160	Bright	sS	1,068	631	SupplierStandard	11.75
104103306100129	33	2,160	Bright	zZ	1,068	631	SupplierStandard	11.75
104103305300129	33	2,160	Galvanized	sS	1,068	631	SupplierStandard	11.75
104103306300129	33	2,160	Galvanized	zZ	1,068	631	SupplierStandard	11.75
104103405070129	34	1,960	Bright	sS	1,103	670	SupplierStandard	12.48
104103406070129	34	1,960	Bright	zZ	1,103	670	SupplierStandard	12.48
104103405270129	34	1,960	Galvanized	sS	1,103	670	SupplierStandard	12.48
104103406270129	34	1,960	Galvanized	zZ	1,103	670	SupplierStandard	12.48
104103405100129	34	2,160	Bright	sS	1,133	670	SupplierStandard	12.48

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104103406100129	34	2,160	Bright	zZ	1,133	670	SupplierStandard	12.48
104103405300129	34	2,160	Galvanized	sS	1,133	670	SupplierStandard	12.48
104103406300129	34	2,160	Galvanized	zZ	1,133	670	SupplierStandard	12.48
104103505070129	35	1,960	Bright	sS	1,169	710	SupplierStandard	13.23
104103506070129	35	1,960	Bright	zZ	1,169	710	SupplierStandard	13.23
104103505270129	35	1,960	Galvanized	sS	1,169	710	SupplierStandard	13.23
104103506270129	35	1,960	Galvanized	zZ	1,169	710	SupplierStandard	13.23
104103505100129	35	2,160	Bright	sS	1,201	710	SupplierStandard	13.23
104103506100129	35	2,160	Bright	zZ	1,201	710	SupplierStandard	13.23
104103505300129	35	2,160	Galvanized	sS	1,201	710	SupplierStandard	13.23
104103506300129	35	2,160	Galvanized	zZ	1,201	710	SupplierStandard	13.23
104103605070129	36	1,960	Bright	sS	1,237	751	SupplierStandard	14
104103606070129	36	1,960	Bright	zZ	1,237	751	SupplierStandard	14
104103605270129	36	1,960	Galvanized	sS	1,237	751	SupplierStandard	14
104103606270129	36	1,960	Galvanized	zZ	1,237	751	SupplierStandard	14
104103605100129	36	2,160	Bright	sS	1,271	751	SupplierStandard	14
104103606100129	36	2,160	Bright	zZ	1,271	751	SupplierStandard	14
104103605300129	36	2,160	Galvanized	sS	1,271	751	SupplierStandard	14
104103606300129	36	2,160	Galvanized	zZ	1,271	751	SupplierStandard	14
104103805070129	38	1,960	Bright	sS	1,378	837	SupplierStandard	15.59
104103806070129	38	1,960	Bright	zZ	1,378	837	SupplierStandard	15.59
104103805270129	38	1,960	Galvanized	sS	1,378	837	SupplierStandard	15.59
104103806270129	38	1,960	Galvanized	zZ	1,378	837	SupplierStandard	15.59
104103805100129	38	2,160	Bright	sS	1,416	837	SupplierStandard	15.59
104103806100129	38	2,160	Bright	zZ	1,416	837	SupplierStandard	15.59
104103805300129	38	2,160	Galvanized	sS	1,416	837	SupplierStandard	15.59
104103806300129	38	2,160	Galvanized	zZ	1,416	837	SupplierStandard	15.59
104104005070129	40	1,960	Bright	sS	1,527	927	SupplierStandard	17.28
104104006070129	40	1,960	Bright	zZ	1,527	927	SupplierStandard	17.28
104104005270129	40	1,960	Galvanized	sS	1,527	927	SupplierStandard	17.28
104104006270129	40	1,960	Galvanized	zZ	1,527	927	SupplierStandard	17.28

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104104005100129	40	2,160	Bright	sS	1,569	927	SupplierStandard	17.28
104104006100129	40	2,160	Bright	zZ	1,569	927	SupplierStandard	17.28
104104005300129	40	2,160	Galvanized	sS	1,569	927	SupplierStandard	17.28
104104006300129	40	2,160	Galvanized	zZ	1,569	927	SupplierStandard	17.28
104104105070129	41	1,960	Bright	sS	1,604	974	SupplierStandard	18.14
104104106070129	41	1,960	Bright	zZ	1,604	974	SupplierStandard	18.14
104104105270129	41	1,960	Galvanized	sS	1,604	974	SupplierStandard	18.14
104104106270129	41	1,960	Galvanized	zZ	1,604	974	SupplierStandard	18.14
104104105100129	41	2,160	Bright	sS	1,648	974	SupplierStandard	18.14
104104106100129	41	2,160	Bright	zZ	1,648	974	SupplierStandard	18.14
104104105300129	41	2,160	Galvanized	sS	1,648	974	SupplierStandard	18.14
104104106300129	41	2,160	Galvanized	zZ	1,648	974	SupplierStandard	18.14
104104205070129	42	1,960	Bright	sS	1,683	1,022	SupplierStandard	19.05
104104206070129	42	1,960	Bright	zZ	1,683	1,022	SupplierStandard	19.05
104104205270129	42	1,960	Galvanized	sS	1,683	1,022	SupplierStandard	19.05
104104206270129	42	1,960	Galvanized	zZ	1,683	1,022	SupplierStandard	19.05
104104205100129	42	2,160	Bright	sS	1,729	1,022	SupplierStandard	19.05
104104206100129	42	2,160	Bright	zZ	1,729	1,022	SupplierStandard	19.05
104104205300129	42	2,160	Galvanized	sS	1,729	1,022	SupplierStandard	19.05
104104206300129	42	2,160	Galvanized	zZ	1,729	1,022	SupplierStandard	19.05
104104305070129	43	1,960	Bright	sS	1,764	1,072	SupplierStandard	19.97
104104306070129	43	1,960	Bright	zZ	1,764	1,072	SupplierStandard	19.97
104104305270129	43	1,960	Galvanized	sS	1,764	1,072	SupplierStandard	19.97
104104306270129	43	1,960	Galvanized	zZ	1,764	1,072	SupplierStandard	19.97
104104305100129	43	2,160	Bright	sS	1,813	1,072	SupplierStandard	19.97
104104306100129	43	2,160	Bright	zZ	1,813	1,072	SupplierStandard	19.97
104104305300129	43	2,160	Galvanized	sS	1,813	1,072	SupplierStandard	19.97
104104306300129	43	2,160	Galvanized	zZ	1,813	1,072	SupplierStandard	19.97
104104405070129	44	1,960	Bright	sS	1,848	1,122	SupplierStandard	20.9
104104406070129	44	1,960	Bright	zZ	1,848	1,122	SupplierStandard	20.9
104104405270129	44	1,960	Galvanized	sS	1,848	1,122	SupplierStandard	20.9

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104104406270129	44	1,960	Galvanized	zZ	1,848	1,122	SupplierStandard	20.9
104104405100129	44	2,160	Bright	sS	1,898	1,122	SupplierStandard	20.9
104104406100129	44	2,160	Bright	zZ	1,898	1,122	SupplierStandard	20.9
104104405300129	44	2,160	Galvanized	sS	1,898	1,122	SupplierStandard	20.9
104104406300129	44	2,160	Galvanized	zZ	1,898	1,122	SupplierStandard	20.9
104104505070129	45	1,960	Bright	sS	1,932	1,174	SupplierStandard	21.87
104104506070129	45	1,960	Bright	zZ	1,932	1,174	SupplierStandard	21.87
104104505270129	45	1,960	Galvanized	sS	1,932	1,174	SupplierStandard	21.87
104104506270129	45	1,960	Galvanized	zZ	1,932	1,174	SupplierStandard	21.87
104104505100129	45	2,160	Bright	sS	1,985	1,174	SupplierStandard	21.87
104104506100129	45	2,160	Bright	zZ	1,985	1,174	SupplierStandard	21.87
104104505300129	45	2,160	Galvanized	sS	1,985	1,174	SupplierStandard	21.87
104104506300129	45	2,160	Galvanized	zZ	1,985	1,174	SupplierStandard	21.87
104104605070129	46	1,960	Bright	sS	2,019	1,226	SupplierStandard	22.84
104104606070129	46	1,960	Bright	zZ	2,019	1,226	SupplierStandard	22.84
104104605270129	46	1,960	Galvanized	sS	2,019	1,226	SupplierStandard	22.84
104104606270129	46	1,960	Galvanized	zZ	2,019	1,226	SupplierStandard	22.84
104104605100129	46	2,160	Bright	sS	2,075	1,226	SupplierStandard	22.84
104104606100129	46	2,160	Bright	zZ	2,075	1,226	SupplierStandard	22.84
104104605300129	46	2,160	Galvanized	sS	2,075	1,226	SupplierStandard	22.84
104104606300129	46	2,160	Galvanized	zZ	2,075	1,226	SupplierStandard	22.84
104104805070129	48	1,960	Bright	sS	2,199	1,335	SupplierStandard	24.89
104104806070129	48	1,960	Bright	zZ	2,199	1,335	SupplierStandard	24.89
104104805270129	48	1,960	Galvanized	sS	2,199	1,335	SupplierStandard	24.89
104104806270129	48	1,960	Galvanized	zZ	2,199	1,335	SupplierStandard	24.89
104104805100129	48	2,160	Bright	sS	2,259	1,335	SupplierStandard	24.89
104104806100129	48	2,160	Bright	zZ	2,259	1,335	SupplierStandard	24.89
104104805300129	48	2,160	Galvanized	sS	2,259	1,335	SupplierStandard	24.89
104104806300129	48	2,160	Galvanized	zZ	2,259	1,335	SupplierStandard	24.89
104105005070129	50	1,960	Bright	sS	2,386	1,449	SupplierStandard	27.01
104105006070129	50	1,960	Bright	zZ	2,386	1,449	SupplierStandard	27.01

Verope Steel Wire Rope Verotop

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
104105005270129	50	1,960	Galvanized	sS	2,386	1,449	SupplierStandard	27.01
104105006270129	50	1,960	Galvanized	zZ	2,386	1,449	SupplierStandard	27.01
104105005100129	50	2,160	Bright	sS	2,451	1,449	SupplierStandard	27.01
104105006100129	50	2,160	Bright	zZ	2,451	1,449	SupplierStandard	27.01
104105005300129	50	2,160	Galvanized	sS	2,451	1,449	SupplierStandard	27.01
104105006300129	50	2,160	Galvanized	zZ	2,451	1,449	SupplierStandard	27.01
104105205070129	52	1,960	Bright	sS	2,580	1,567	SupplierStandard	29.19
104105206070129	52	1,960	Bright	zZ	2,580	1,567	SupplierStandard	29.19
104105205270129	52	1,960	Galvanized	sS	2,580	1,567	SupplierStandard	29.19
104105206270129	52	1,960	Galvanized	zZ	2,580	1,567	SupplierStandard	29.19
104105205100129	52	2,160	Bright	sS	2,651	1,567	SupplierStandard	29.19
104105206100129	52	2,160	Bright	zZ	2,651	1,567	SupplierStandard	29.19
104105205300129	52	2,160	Galvanized	sS	2,651	1,567	SupplierStandard	29.19
104105206300129	52	2,160	Galvanized	zZ	2,651	1,567	SupplierStandard	29.19
104105405070129	54	1,960	Bright	sS	2,783	1,690	SupplierStandard	31.48
104105406070129	54	1,960	Bright	zZ	2,783	1,690	SupplierStandard	31.48
104105405270129	54	1,960	Galvanized	sS	2,783	1,690	SupplierStandard	31.48
104105406270129	54	1,960	Galvanized	zZ	2,783	1,690	SupplierStandard	31.48
104105405100129	54	2,160	Bright	sS	2,910	1,690	SupplierStandard	31.48
104105406100129	54	2,160	Bright	zZ	2,910	1,690	SupplierStandard	31.48
104105405300129	54	2,160	Galvanized	sS	2,910	1,690	SupplierStandard	31.48
104105406300129	54	2,160	Galvanized	zZ	2,910	1,690	SupplierStandard	31.48
104105605070129	56	1,960	Bright	sS	2,993	1,818	SupplierStandard	33.86
104105606070129	56	1,960	Bright	zZ	2,993	1,818	SupplierStandard	33.86
104105605270129	56	1,960	Galvanized	sS	2,993	1,818	SupplierStandard	33.86
104105606270129	56	1,960	Galvanized	zZ	2,993	1,818	SupplierStandard	33.86
104105605100129	56	2,160	Bright	sS	3,129	1,818	SupplierStandard	33.86
104105606100129	56	2,160	Bright	zZ	3,129	1,818	SupplierStandard	33.86
104105605300129	56	2,160	Galvanized	sS	3,129	1,818	SupplierStandard	33.86
104105606300129	56	2,160	Galvanized	zZ	3,129	1,818	SupplierStandard	33.86