

Beam Clamp IPSTARTEC11

Product information



IPSTARTEC11 lifting clamps are suitable for horizontal (with flanges horizontal) lifting, transport, stacking and controlled tilting of steel IPE- en HEA-profiles. By placing the chain guide in the appropriate position, it is easy to switch from lifting to tilting and back again, which shifts the center of gravity.

Features:

- Available in capacities of 1.5 and 2.5 metric tons.
- Jaw openings available: 6 to 20mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- All sizes are RFID EQUIPPED.

... [Read more](#)

Features:

Material: Alloy steel.


Marking: According to standard, CE-marked, WLL, Logo, Jaw opening, Serial number

Temperature range: -40°C up to +100°C

Standard: EN 13155

Beam Clamp IPSTARTEC11

Blueprint

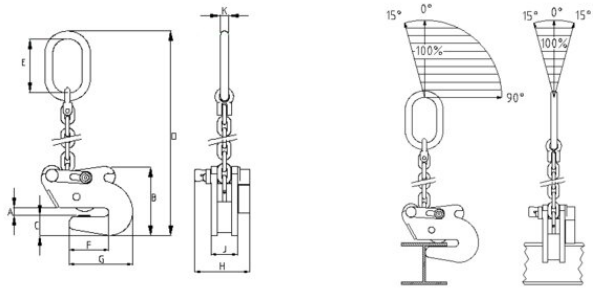

Technical data

Part code	WLL (metric) tonnes	Jaw width in	Model	A in	B in	C in	D, in	E in	F in	G, in	H, in	J in	K in	Weight lb
502100150120240	1.5	0.24-0.47	1.5-IPSTARTEC11	0.24-0.47	5.51	1.54	22.64	4.33	3.19	5.08	4.96	2.13	0.63	14.55
502100250200240	2.5	0.24-0.79	2.5-IPSTARTEC11	0.24-0.79	8.27	2.17	28.54	5.31	4.53	7.17	5.51	2.91	0.71	31.97