


Clevis Shackle X-066, painted grade 100 shackle

Product information

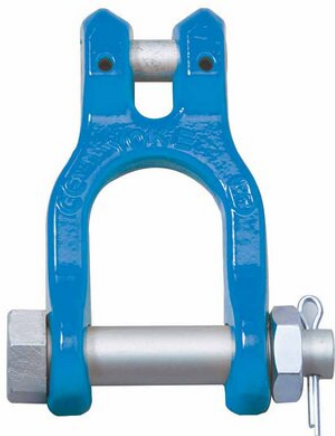

- At least 25% greater WLL than traditional Grade 8 products.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C.
- Magnaflux crack detection is performed 100% on each batch.
- Manufactured in accordance with EN 1677- 1 and ASME B30.26.

When fitting G10 components are added to G8 chain, the sling is rated at G8 WLL
... [Read more](#)

Material: Quenched and Tempered Alloy Steel

Marking: According to standard, Size, grade, manufacturer ID, traceability

Temperature range: -40° up to +200°C (without reduction in WLL).

Finish: Blue painted


Standard: EN 1677-1

Safety factor: 4:1

Grade: 10

Clevis Shackle X-066, painted grade 100 shackle

Blueprint

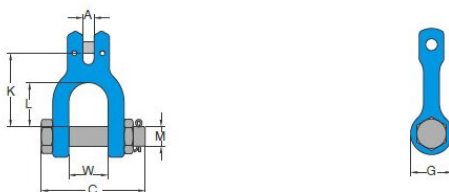

Technical data

Part code	Chain diameter in	WLL	EWL mm	Weight lb
420100250950	1/4-5/16	5,700	59	0.88
420100400950	3/8	8,800	78	1.76
420100670950	1/2	15,000	98	3.09
420101000950	5/8	22,600	112	5.51