




G-257



- Forged Steel - Quenched and Tempered.
- Hot Dip galvanized.
- All Bolts Hot Dip galvanized after threading.
- Diameter of ring stock is same as shank diameter.

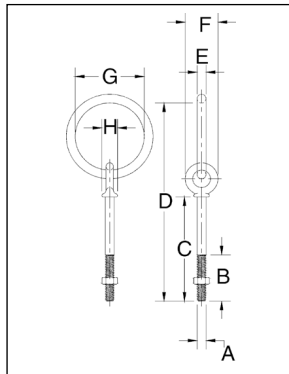

G-257 Shoulder Nut Ring Bolts

| Ring Bolt Size (in.) | G-257 Stock No. | Working Load Limit (lbs.)* | Weight Per 100 (lbs.) | Dimensions (in.) | | | | | | | |
|----------------------|-----------------|----------------------------|-----------------------|------------------|------|------|-------|-----|------|------|-----|
| | | | | A | B | C | D | E | F | G | H |
| 3/8 x 4-1/2 | 1046335 | 1200 | 56.60 | .38 | 2.50 | 4.50 | 7.66 | .38 | 1.38 | 2.00 | .66 |
| 1/2 X 6 | 1046371 | 2200 | 100.00 | .50 | 3.00 | 6.00 | 10.00 | .50 | 1.75 | 2.50 | .91 |


*Ultimate Load is 5 times the Working Load Limit.



S-264



- Forged Steel — Quenched and Tempered.
- Forged from 1035 Carbon Steel.
- Excellent welding qualities.
- Widely used on farm machinery, trucks, steel hulled marine vessels and material handling equipment.
- Reference American Welding Society specifications for proper welding procedures.



S-264 Pad Eyes

| Size No.* | S-264 Stock No. | Weight Per 100 (lbs.) | Dimensions (in.) | | | | | | |
|-----------|-----------------|-----------------------|------------------|-----|------|-----|------|-----|------|
| | | | B | C | D | E | G | H | L |
| * 0 | 1090722 | 2.80 | .25 | .19 | .63 | .31 | .63 | .09 | .75 |
| * 1 | 1090740 | 6.50 | .38 | .25 | .88 | .41 | .88 | .13 | 1.03 |
| * 1-1/2 | 1090768 | 10.40 | .63 | .25 | 1.00 | .44 | 1.13 | .16 | 1.31 |
| 2 | 1090786 | 21.10 | .75 | .38 | 1.06 | .50 | 1.50 | .19 | 1.63 |
| 4 | 1090802 | 52.20 | 1.00 | .56 | 1.44 | .78 | 2.13 | .22 | 2.34 |
| 5 | 1090820 | 82.50 | 1.25 | .69 | 1.75 | .81 | 2.63 | .25 | 2.75 |

*Meets the requirements of Military Specification MS-51930A.



Industrial Rigging & Supply

Copyright © 2013 The Crosby Group LLC All Rights Reserved