


Eye Grip Safe Locking Hook

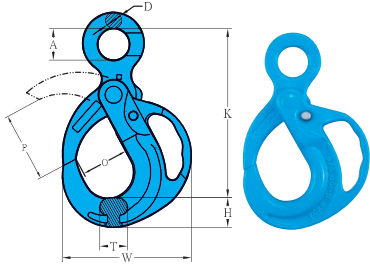


Size	Working Load Limit tonnes*	For Grade 100 Chain mm	Dimensions (mm)								N.W. kg
			A	D	H	K	O	P	T	W	
3/8"	4.0	10	32	13	31	175	49	71	27	139	1.9
1/2"	6.7	13	40	16	39	227	57	80	34	174	3.0
5/8"	10.0	16	50	21	47	277	78	114	39	212	6.3
3/4"	16.0	20	60	23	56	329	91	127	54	250	11.7
7/8"	19.0	22	70	24	59	350	105	151	56	260	14.5

Patent Pending

★ Design factor 4:1 proof tested and certified

Clevis Grip Safe Locking Hook

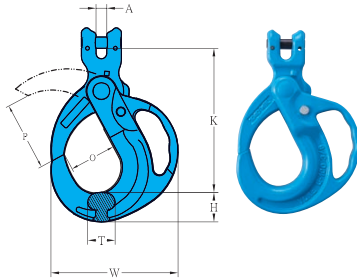


Size	Working Load Limit tonnes*	For Grade 100 Chain (mm)	Dimensions (mm)								N.W. kg
			A	H	K	O	P	T	W		
3/8"	4.0	10	11	31	153	49	71	27	139	1.9	
1/2"	6.7	13	14	39	206	57	80	34	174	4.1	
5/8"	10.0	16	18	47	243	78	114	39	212	6.4	
3/4"	16.0	20	21	56	310	91	127	54	250	12.7	
7/8"	19.0	22	24	59	300	105	151	56	260	14.1	

Patent Pending

★ Design factor 4:1 proof tested and certified

Swivel Grip Safe Locking Hook



Size	Working Load Limit tonnes*	For Grade 100 Chain (mm)	Dimensions (mm)								N.W. kg	
			A	B	D	H	K	O	P	T		W
3/8"	4.0	10	41	34	16	31	225	49	71	27	139	2.4
1/2"	6.7	13	46	44	21	39	285	57	80	34	174	5.2
5/8"	10.0	16	61	50	23	47	345	78	114	39	212	8.4
3/4"	16.0	20	74	82	25	56	433	91	127	54	250	14.5
7/8"	19.0	22	97	95	33	59	475	105	151	56	260	19.9

★ Design factor 4:1 proof tested and certified

Patent Pending



Industrial Rigging & Supply