

Vertical Non-Marking Lifting Clamp Terrier TNMK

Product information



Vertical lifting clamp TNMK/STNMK/TNMK-A - Non marking. Clamp for vertical lifting and transporting of all plates and structures without marking, scratching and or damaging the material surface. Perfect for lifting materials such as (stainless) steel, aluminum, nature stone, composite, painted materials, wood, glass, plastic, etc .

Model TNMK: Standard clamp

Model STNMK: Clamp with enlarged jaw opening.

Model TNMK-A: with adjustable extra large jaw opening: 0 to 180 mm (A)
(adjustable steps of 20 mm)

Features:

- With 2 special synthetic anti-friction pads to guarantee non-marking
- Supplied with chain lifting shackle for flexible lifting
- Always equipped with a safety mechanism, ensuring the clamp does not slip when non-marking lifting force is applied and when load is being lowered
- Clamp is locked in closed as well as open position
- Lightweight, maintenance-friendly, heavy duty body
- No minimal WLL needed.

... [Read more](#)


Marking: According to standard, CE-marked, Type, serial number, WLL, Jaw opening.

Temperature range: -10°C up to +60°C

Standard: EN 13155

Vertical Non-Marking Lifting Clamp Terrier TNMK

Blueprint

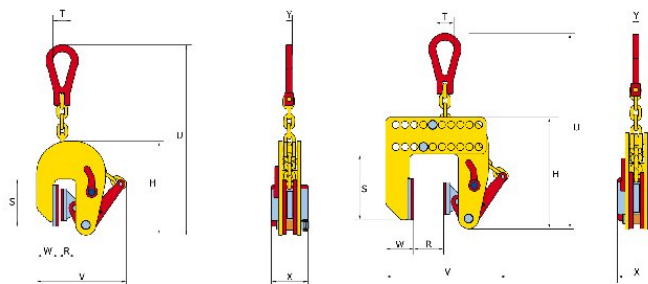

Technical data

Part code	Code	WLL (metric tonnes)	Jaw width in	H, in	S in	T in	U mm in	V mm in	Wmm in	X mm in	Ymm in	Weight lb
502100050200660	0.5 TNMK	0.5	0-0.79	8.07	4.02	1.57	18.19	8.82	1.89	3.15	0.55	13.23
502100050370660	0.5 STNMK	0.5	0.67-1.46	8.07	4.02	1.57	18.19	9.49	1.89	3.15	0.55	13.23
502100051800660	0.5 TNMK-A	0.5	0-7.09	9.53	5.63	1.57	16.14	9.25-15.55	2.4	3.15	0.55	22.05
502100100300660	1 TNMK	1	0-1.18	9.13	4.13	1.57	18.5	11.1	1.81	3.15	0.55	14.33
502100150400660	1.5 TNMK	1.5	0-1.57	9.13	4.13	1.57	18.5	11.1	1.81	3.15	0.55	14.33
502100200500660	2 TNMK	2	0-1.97	14.25	4.88	1.97	27.72	16.06	2.48	3.15	0.71	33.07
502100300600660	3 TNMK	3	0-2.36	14.25	4.88	1.97	27.72	16.06	2.48	3.15	0.71	34.17